
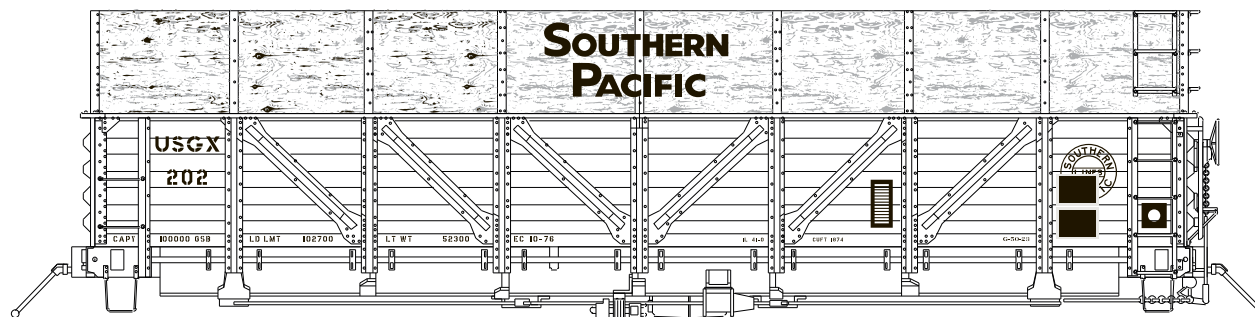


This set duplicates the knotholes and wood grain found on plywood in various states of weathering. For brand new plywood use the top stripe. Slightly weathered plywood is the middle strip and extreme weathered plywood is the bottom. One may decide to use this texture first then plend in surface paint over the decal. Another method would be to seal the decal with a matt finish. Use rubber cement over portions of the texture. Paint the model, peeling the rubber cement off revealing the texture for the ultimate in realism!

MICROSCALE Decal
HO Scale 87-1406
N Scale 60-1406

An Southern Pacific wood beat rack is illustrated with plywood extensions. The possibilities for this set extend much further then just this application.

Use SP Beat Rack set 87-1314 for lettering

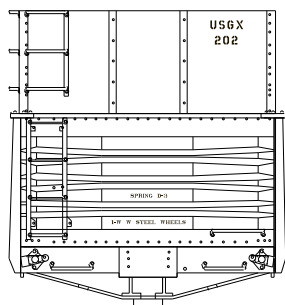

visit us online!
www.microscale.com
sign up for the
monthly newsletter!

Paint Info:

- Application before painting the model the final color.
- Seal with a matte finish. As matte finish is drying pour salt (or modeler can apply rubber cement after matte finish dries) on the finish
- Paint final color over texture and salts (or rubber cement) stuck to the matte finish
- Rub salts (or rubber cement) off the model after paint is dry to reveal the underlying texture

Photos and data available here:
<http://rrpicturearchives.net/>